



**SPECIFIKACIJA PAPIRJA
PAPIER SPEZIFIKATION
PAPER SPECIFICATIONTS
TS-OCR L 08.2000**

Goričane Tovarna papirja Medvode d.d.
Ladja 10, 1215 Medvode, Slovenija
Tel.: +386 1 58 23 400
Fax.: +386 1 36 13 319, 36 12 804
<http://www.goricane.si>
e-mail: goricane@goricane.si

SORA OCR L

PARAMETER	STANDARD NORM	ENOTA EINHEIT UNIT	SPECIFIKACIJA SPEZIFIKATION SPECIFICATION	TOLERANCA TOLERANZ TOLERANCE
Gramatura Flächengewicht Grammage	DIN EN ISO 536	g/m ²	90	± 2
Spec. volumen Spez. Volumen Spec. volume	DIN 53105	cm ³ /g	1,30	± 0,05
Gladkost Bendtsen Glatte Bendtsen Smoot. Bendtsen	ISO 8791-2	ml/min	200	± 50
Absolutna vlaga Abs. Feuchtigkeit Abs. humidity	DIN EN 20287	%	4.8	± 0.5
ISO Belina ISO Weissgrad ISO Brightness R 457 nm (UV radiation included)	TAPPI 452	%	98	± 1
Opaciteta Opazität Opacity	ISO 2471	%	92	min

Predstavnik vodstva: Marjan Kocjančič
Managementvertreter:
Management representative:

Spezifikacija ist nur für Information. Nach Einzelheiten fragen Sie beim Hersteller.
Specification is informative. For details contact the producer.




Papir za neskončne obrazce
Papier für Endlosvordruck
Paper for continuous stationery usage



- Primeren za občutljive optične čitalce
- Dobre mehanske lastnosti
- Dobra dimenzionalna stabilnost
- Primerna togost
- Nizka abrazivnost (perforacija)
- Geeignet für OCR
- Gute mechanische Eigenschaften
- Gute Formbeständigkeit
- Richtige Steifigkeit
- Niedrigerer Abriebgrad (Durchlochen)
- Suitable for OCR
- Good mechanical properties
- High dimensional stability
- Adequate rigidity
- Low abrasiveness (perforation)

STRUKTURA PAPIRJA | PAPIERSTRUKTUR | PAPER STRUCTURE

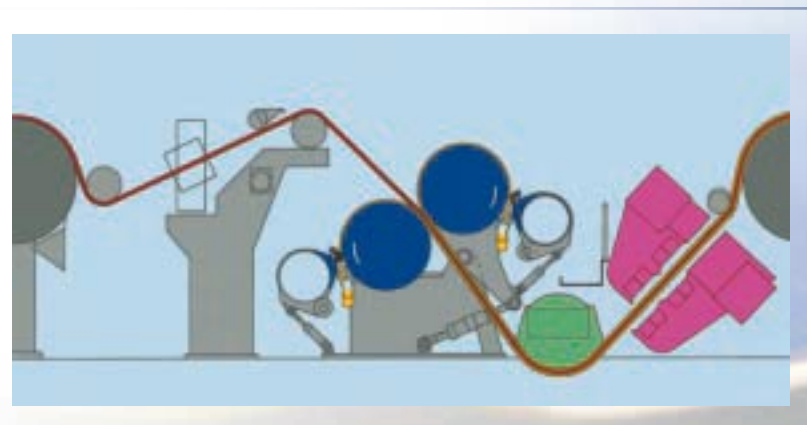

SPEEDFLOW TECHNOLOGY

SORA OCR L